

Paslanmaz Düz Flanşlı Stainless Steel Flat Flange



Ürün Kodu / Product Code

TKC8810 – 8820

Malzeme / Material: AISI304 – AISI316

Bağlantı / Connection: PN16

PASLANMAZ DÜZ FLANŞ

Paslanmaz Düz Flanş, hatlarda bulunan borulara geçirilerek hem önden hem arkadan kaynak yapılarak birbirlerine bağlanırlar.

Karşılıklı olarak hatta bağlanan Paslanmaz Düz Flanş, üzerinde bulunan civata delikleri kullanılarak birbirlerine bağlanır. Bu bağlantı yapılırken iki flanş arasında conta konularak sızdırmazlık sağlanır.

UYGULAMA ALANLARI

- Mutfak Eşyalar,
- Gıda üretim makinaları ve tesisleri
- İlaç üretim makinaları ve tesisleri
- Dekorasyon
- Ambalaj makinaları ve tesisleri
- Havuz ve sulama sistemleri, Sıvı depolama sistemleri

STAINLESS STEEL FLAT FLANGE

Stainless Steel Flat Flange, stainless steel flat flanges are fitted onto the pipes in the pipeline and welded both from the front and the back to connect them securely.


Opposing flat flanges, mounted on the pipeline, are bolted together using the bolt holes located on each flange.

During this connection process, a gasket is placed between the two flanges to ensure a proper seal and prevent leakage.

APPLICATION AREAS

- Kitchenware
- Food production machinery and facilities
- Pharmaceutical production machinery and facilities
- Decoration and interior design
- Packaging machinery and facilities
- Pool and irrigation systems, liquid storage systems

Teknik Çizim / Drawing

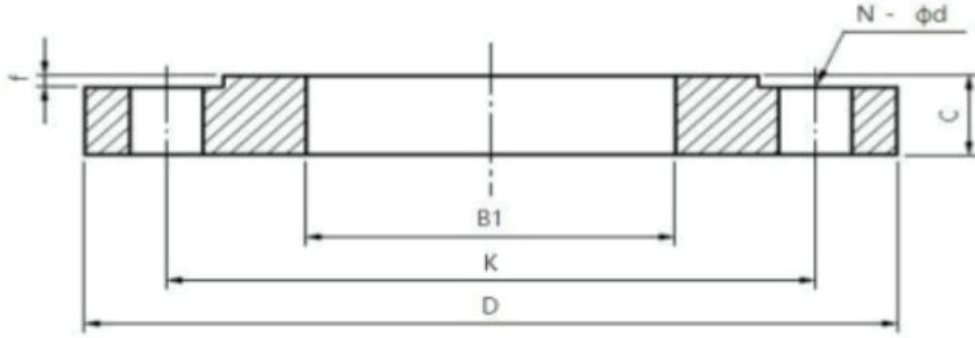

SIZE	D	B1	C	K	C	f	d	N
			Without Raisedface					
DN15	95	22	12	65	14	2	14	4
DN20	105	27,5	14	75	16	2	14	4
DN25	115	34,5	14	85	16	2	14	4
DN32	140	43,5	16	100	18	2	18	4
DN40	150	49,5	15	110	18	3	18	4
DN50	165	62	17	125	20	3	18	4
DN65	185	78	17	145	20	3	18	4
DN80	200	90,5	17	160	20	3	18	8
DN100	220	116	19	180	22	3	18	8
DN125	250	141,5	19	210	22	3	18	8
DN150	285	170,5	21	240	24	3	22	8
DN200	340	221,5	23	295	26	3	22	12
DN250	405	276,5	26	355	29	3	26	12
DN300	460	327,5	28	410	32	4	26	12

